



REVISIONS		
REV	DESCRIPTION	DATE

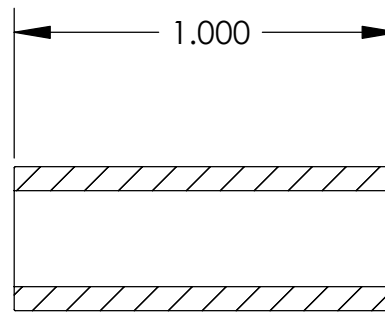

SECTION A-A

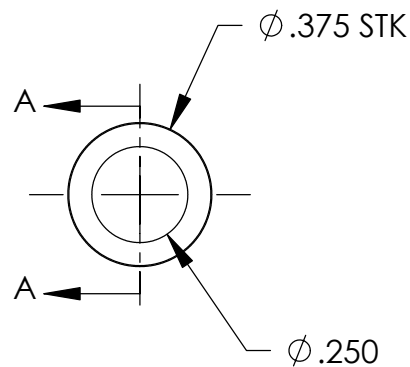

- NOTES:
1. MAKE FROM 3/8OD X 1/4 ID G-10 TUBING.
  2. .250 DIA TO FIT OD OF P/N -134.

UNLESS OTHERWISE SPECIFIED:		<div>High Precision Devices</div> <div>1668 Valtec Lane, Suite C, Boulder, Colorado 80301 Phone: (303) 447-2558 Fax: (303) 447-2548 Web Site: <a href="http://www.hpd-online.com">www.hpd-online.com</a></div>			
DIMENSIONS ARE IN INCHES DECIMAL TOLERANCES: .X ±.030 .XX ±.015 .XXX ±.005					
ANGULAR TOL: ± 1° SURFACE ROUGHNESS: 63/√		TITLE: <b>p02101-193 tube, G-10 spacer</b>			
INTERNAL AND EXTERNAL SURFACE INTERSECTIONS SHALL BE UNIFORMLY FINISHED WITH CHAMFER .005/.010 X 45° OR RADIUS .005/.010. CHAMFER ALL THREADED HOLES 110° OF MAJOR DIAMETER X 45°		CONFIGURATION: <b>00-Default</b>			
MATERIAL: <b>G-10</b>	SIZE <b>A</b>	QTY PER ASSM: <b>5</b>	SCALE: <b>2:1</b>	SHEET <b>1</b> OF <b>1</b>	REV <b>A</b>
FINISH: <b>NONE</b>		DATE: <b>5/27/2004</b>	DRAWN BY: <b>C. Danaher</b>		